


PLANTA NS 060 | PI_78 -> PI_77 | RUA IGUAPE

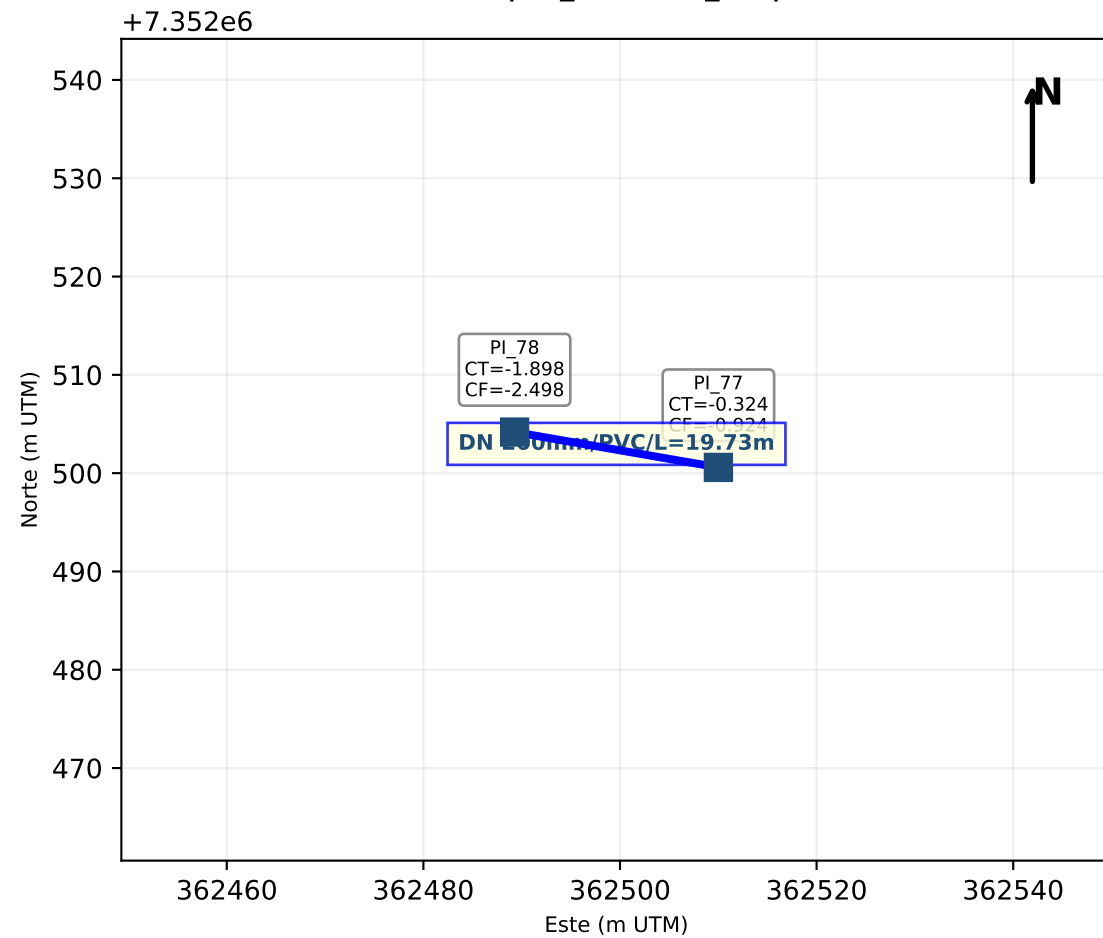

Quantitativo:

Volume de Escavacao = 9.470 m3

Volume de Aterro = 1.705 m3


Pavimentacao = 14.21 m2

Extensao Total = 19.73 m


--- PVC ---

4 barras 200mm PVC

LEGENDA



PERFIL LONGITUDINAL Exag. vertical ~10x

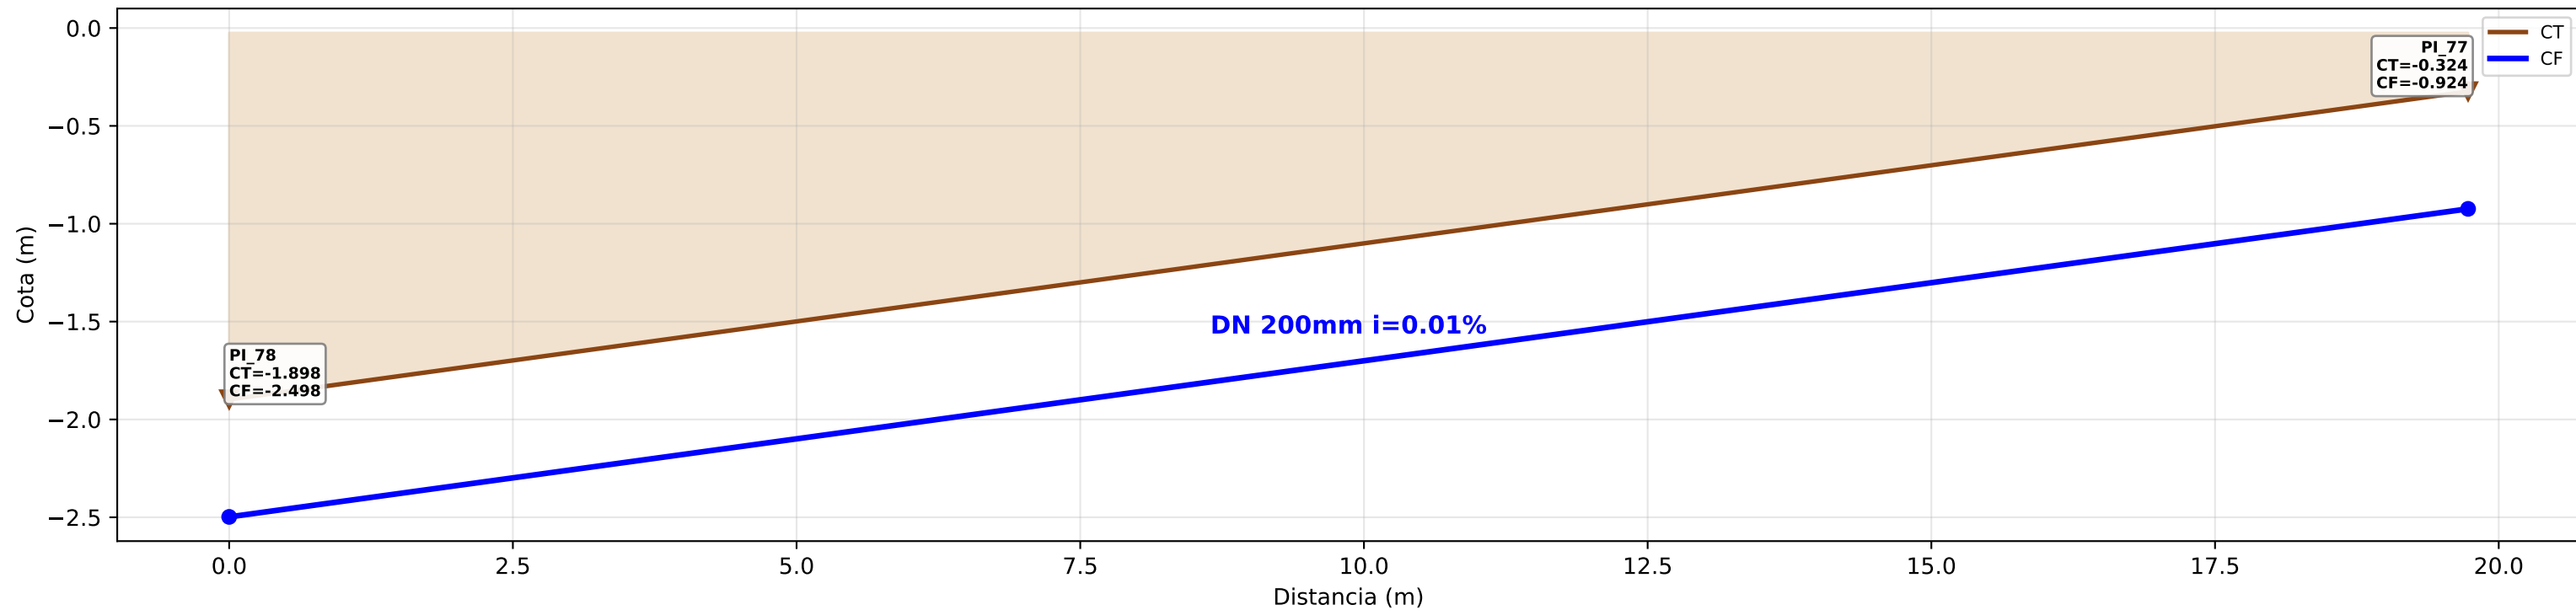

Estaca	CT (m)	CF (m)	Prof (m)	Dist (m)	DN (mm)	Decl (%)
PI_78	-1.898	-2.498	0.60	0.00	200	0.01
PI_77	-0.324	-0.924	0.60	19.73	200	0.01

SABESP
SISTEMA DE ESGOTAMENTO
SANITARIO SANTOS/SP

CONTRATO: 11481051
NS No 060
NUCLEO: Pantanal Baixo
ENG.: Felipe Nery
ConstruData HydroNetwork Rev. 0